



# PAR30 14W LED Lamp



A state of the art LED source and advanced driver, control, and thermal components comprise an integrated LED system with superior lifetime performance. Exceptional optics creates enhanced color uniformity and high lumen output, providing the quality and brightness of light produced by conventional light sources.

quivalent Source	75W Halogen	
pical Power Consumption	12W	
Max. Power Consumption	14W	
.ED source	9*1.3W Cree XRE	
Base/Socket	Medium (E26)	
Beam Spread	Narrow Spot, Narrow Flood, Wide Flood, Very Wide Flood	
Operating Temperature	-20°C to +40 °C	
MOL	3.58", 91mm	
Voltage	AC 120V	
Rated Life	40,000 hours	
Certifications	FC RÖHS ULISTED	

## benefits

#### **Reduced Energy Consumption**

Uses up to 90% less power than incandescent bulbs

### Long-Lasting:

Lasts up to 10 times as long as compact fluorescents (CFLs) and up to 100 times longer than incandescents.

#### **Durable:**

A solid-state device with no moving parts. Contains no fragile filaments or tubes as in incandescent bulbs. The electronic chip is encapsulated in an epoxy substrate, which provides a protective seal against outside or foreign elements. Resistant to heat, cold and shock

#### **More Efficient**

Can generate twice the brightness of light (Lumens) at a fifth the wattage of an incandescent

#### Customizable

Highly customizable (color, beam spread, base, etc.) to fit all lighting needs

#### No Heat Build Up

Generates little to no heat during operation. This optimizes energy-efficiency (incandescent bulbs emit up to 98 percent of their energy as heat) and reduces demands on air-conditioning.

### **Mercury Free**

No mercury is used in the manufacturing of LEDs.


Specifications		Cool White
Color Temperature	2000-3500K	4500K+
Lumen Output	614 Lm	762 Lm
Efficacy	53 Lm/W	65 Lm/W
Color Rendering Index (CRI)	80+	70+



# PAR30 14W LED Lamp

## Dimensions (in/mm)



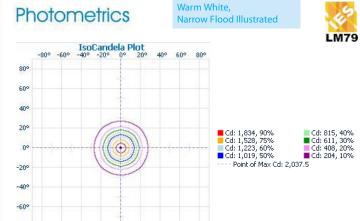

Ordering Information

example: NV/PAR30/9.1/WW/NFL/26/CR

product LED source CR - Cree XRE NV/PAR30/9.1 - PAR30 9\*1.3W WW - Warm White NSP - Narrow Spot 26 - E26 (Med.) CW - Cool White NFL - Narrow Flood WFL - Wide Flood VWFL - Very Wide Flood

\*Note: This product is not designed for use outside, in sealed fixtures, and moist or wet environments.

W - White: 3500-4500K

CW - Cool White: 4500K+

#### Beam Spread Key:

Color Key: WW - Warm White: 2000-3500K

VNSP - Very Narrow Spot: <7° NSP - Narrow Spot: 7°-15°

SP - Spot: 16°-20°

NFL - Narrow Flood: 21°-30° FL - Flood: 31°-40°

WFL - Wide Flood: 41°-60° WWFL - Very Wide Flood: 61°+


## **Product Warranty**

Nu Vue warrants this LED lamp will be free from defects in material and workmanship and will operate for a period of 1 year under normal operation and when used in accordance with operating guidelines. During the warranty period, if the product fails to perform as described, Nu Vue's entire liablilty will be limited to the part or repair or replacement of such a defective product. In no event shall Nu Vue be responsible for removal or reinstallation on any product or for the expenses thereof. The above warranty does not apply to, and Nu Vue makes now warranties with respect to products which have been subjected to misuse, neglect, accident, abuse or operated under conditions that deviate from the parameters, established in Nu Vue's applicable specifications; or have been improperly installed, stored, maintained, repaired or altered by anyone other than Nu Vue; or have had their serial numbers or month and year manufacture or shipment removed, defected or altered. This warranty is given only to the original purchaser and may not be assigned or transferred to any other party. It is the purchaser's obligation to retain appropriate documentation that indicates the date of purchase.



Making the world greener.

9301 Jordan Ave., Unit 105A Chatsworth, CA. 91311 866-996-8883 818-678-9733 sales@nuvuelighting.com



Nu Vue Lighting r is a registered trademark of Nu Vue Lighting L.L.C. c2010 Nu Vue Lighting L.L.C. All Rights Reserved

