


Low Profile Canopy 30-55W

LED



Features

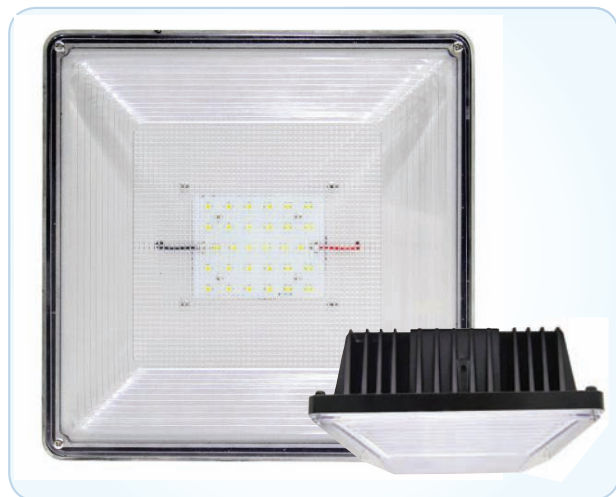

Reduced Energy Consumption

Uses up to 70% less power than High Pressure Sodium and Metal Halide.

Long-Lasting

Lasts up to 4 times as long as Metal Halide and up to 3 times as long as High Pressure Sodium.

Durable

A solid-state device with no moving parts. Contains no fragile filaments or tubes as in incandescent bulbs.

More Efficient

Can generate twice the brightness of light (Lumens) at half the wattage of High Pressure Sodium and Metal Halide.

Customizable

Customizable (color, dimming, voltage) to fit all lighting needs.

No Heat Build Up

Generates little heat during operation which optimizes energy-efficiency.

Mercury Free

No mercury is used in the manufacturing of LEDs.

Description

- Aluminum housing with coated finish for corrosion resistance
- High quality Nichia chips and driver for stable long term operating durability
- UV stabilized and heat resistant polycarbonate lens
- Advanced LED design to achieve lower power consumption at maximum lumen output
- Integrated heatsink design for excellent thermal performance ensuring optimal product life
- Easy assembly, installation and maintenance
- Ceiling, pendant and bracket mounting available
- Applications: Parking garages, stairway security, pathways, underpasses, etc.

Fixture Specifications

CCT: 5500K (4000K available by special request)
CRI: ≥ 75
IP Rating: IP65
Lumen Maintenance: $\geq 70\%$ at 50,000 hours
Rated Life: 50,000 hours

Voltage: 120-277V (347-480V) Optional
Power Factor: ≥ 0.91
Input Frequency: 50/60 Hz
THD: $\leq 10\%$
Operating Temperature: -35°C to 50°C

Color	Wattage (W)	Rated Lumens (Lm)	Efficacy (Lm/W)	Replaces MH/HPS	LED Source
Bronze	30	3,068	104.18	75W	Nichia
Bronze	40	4,431	107.98	125W	Nichia
Bronze	58	5,724	111.6	175W	Nichia

Low Profile Canopy 30-55W

LED


Ordering Information

example: NV/GL/30W/CW/N/DMS/480/C

Product	Wattage	Color Temperature	LED Source	Optional	Mounting
NV/GL	30W	WW - 3000K	N - Nichia	DD - Dimmable driver	C - Ceiling
	40W	NW - 4000K		DMS - Dimming motion sensor	P - Pendant
	55W	CW - 5000K		480 - 480V	B - Bracket
		C60 - 6000K			

Fixture also available in black or white finish

Dimensions

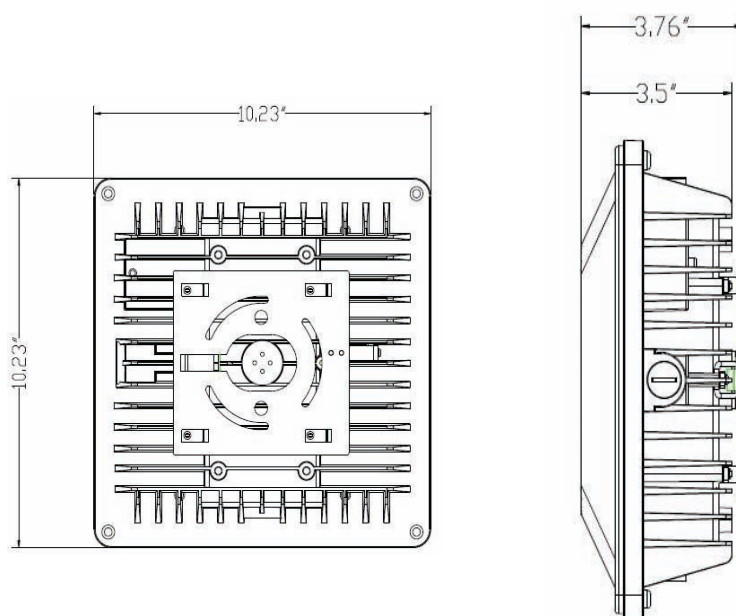

Photometrics

